

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
29 November 2001 (29.11.2001)

PCT

(10) International Publication Number
WO 01/89818 A1

- (51) International Patent Classification⁷: **B29D 30/00**, (74) Common Representative: **PIRELLI PNEUMATICI S.P.A.**; Viale Sarca, 222, I-20126 Milano (IT).
G05B 19/12
- (21) International Application Number: **PCT/EP01/05844** (81) Designated States (*national*): AE, AG, AI, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (22) International Filing Date: **22 May 2001 (22.05.2001)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:
00830385.1 26 May 2000 (26.05.2000) EP (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
60/216,157 3 July 2000 (03.07.2000) US
- (71) Applicant (*for all designated States except US*): **PIRELLI PNEUMATICI S.P.A.** [IT/IT]; Viale Sarca, 222, I-20126 Milano (IT).


- (72) Inventors; and
(75) Inventors/Applicants (*for US only*): **CARETTA, Renato** [IT/IT]; Viale dei Tigli, 16, I-21013 Gallarate (IT).
CANTU', Marco [IT/IT]; Via Fomace, 9, I-20040 Camate (IT).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

[Continued on next page]

(54) Title: **PLANT FOR PRODUCING TYRES OF DIFFERENT TYPES SIMULTANEOUSLY**

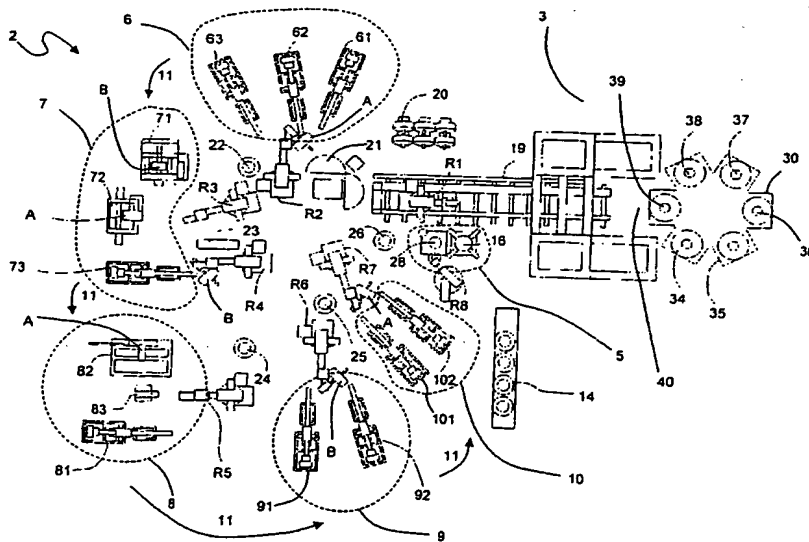

(57) Abstract: Plant for producing tyres of different types simultaneously, comprising a plurality of operating units operating in succession, comprising a central processing unit capable of causing the sequential execution of a plurality of operating steps at work stations, each of which comprises at least one of the said operating units, according to one or more predetermined sequences of types of tyres. The plant also comprises a local processing unit associated with each work station and capable of identifying the type of tyre corresponding to a drum supplied to each of the said operating units, and of selecting, from a predetermined group of operating procedures for each of the said operating units, a specific procedure for the type of tyre corresponding to the drum being worked on.

WO 01/89818 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

PLANT FOR PRODUCING TYRES OF DIFFERENT TYPES
SIMULTANEOUSLY

The present invention relates to a plant and a
5 method for producing tyres which are different from
each other.

A tyre for vehicle wheels normally comprises a
carcass structure, essentially consisting of one or
more carcass plies shaped in an essentially toroidal
10 configuration and having their axially opposing lateral
edges engaged with corresponding annular reinforcing
structures incorporating circumferentially inextensible
inserts usually called "bead wires". Each annular
reinforcing structure is incorporated in what is known
15 as a "bead" formed along an inner circumferential edge
of the tyre for fixing the tyre to a corresponding
mounting rim.

A belt structure, comprising one or more strips of
belt in the shape of a closed loop, essentially
20 consisting of textile or metal cords suitably
orientated with respect to each other and with respect
to the cords belonging to the adjacent carcass plies,
is applied to the carcass structure in a radially
external position.

25 A tread strip, normally consisting of a strip of
elastomeric material of suitable thickness, is also
applied to the belt structure in a radially external
position.

It should be noted that, for the purposes of the
30 present description, the term "elastomeric material"
denotes the rubber mixture in its entirety, in other
words the whole material formed by at least one polymer
base suitably amalgamated with reinforcing fillers,
and/or process additives of various types.

A pair of sidewalls, each of which covers a lateral portion of the tyre lying between what is called a shoulder area, located near the corresponding lateral edge of the tread strip, and the corresponding
5 bead, is applied to the opposite sides of the tyre.

Given the above, it should be noted that each type of tyre is essentially distinguished from the others by a set of chemical and physical, structural, dimensional and appearance characteristics.

10 The chemical and physical characteristics essentially relate to the type and composition of the materials, and particularly to the recipes of the various mixtures used in the production of the elastomeric materials. The structural characteristics
15 essentially define the number and type of the structural components present in the tyre, and their positioning with respect to each other in the structure of the tyre. The dimensional characteristics relate to the geometrical measurements and to the cross-sectional
20 profile of the tyre (external diameter, maximum chord or width, sidewall height and their ratio, in other words the section ratio) and will be indicated simply as "specification" hereafter. The appearance
25 characteristics consist of the design on the rolling surface of the tread, the ornamental patterns and the various pieces of wording or distinctive signs reproduced on the tyre, for example on the sidewalls of the tyre, and will be indicated as a whole as "tread design" in the remainder of the present description.

30 The conventional production processes essentially comprise four distinct steps in the manufacture of tyres:

- a) preparation of the mixtures,
- b) production of the individual structural
35 components,

- c) assembly of the different structural components in succession, to produce a crude tyre on a drum or other suitable support,
- d) vulcanization of the crude tyre with simultaneous stamping of the tread design on the external surface of the tyre.

For the purposes of the present invention, "type of tyre" denotes a tyre having a given specification, given structural components of which it consists, and a given tread design.

In an effort to reduce production costs, technological development has been basically orientated towards the search for technical solutions which would lead to the production of increasingly fast and reliable machinery, in such a way as to minimize the time required to produce each tyre, while maintaining or improving the quality of the finished product.

Thus, plants with high production capacity in terms of pieces produced per unit of time have been produced, using tyre manufacturing machinery which has reduced options for modification (or in other words, is capable of producing only a limited range of types of tyre), but which maximize the serial production of tyres having identical structural characteristics. Purely by way of example, in the most up-to-date plants the output can be up to approximately two carcass per minute, and the average batch output in one month of operation for each article (type of tyre) can be 3200 pieces, with an article-changeover time of 375 minutes.

Attempts have also been made to reduce or eliminate the storage of the semi-finished products present between one and another of the four process steps listed above, in such a way as to minimize the costs and problems involved whenever the type of tyre in production has to be changed. For example, the

document EP 922561 proposes a method for controlling tyre production, in which, in order to reduce or eliminate both the crude tyre storage time and the number of crude tyres being stored, a complex
5 vulcanizing unit is provided, with a number of moulds suitable for constantly absorbing the output of the complex tyre manufacturing unit. The production of tyres of different types, particularly those having different specifications, is achieved by replacing
10 and/or adapting from time to time the machinery provided in the complex tyre manufacturing unit, in conjunction with the replacement of the moulds in the complex vulcanizing unit.

The applicant has found that, in all cases, the
15 production of the tyres entails costs which increase with the variety of types of tyre to be produced: in particular, it is necessary to intervene in the processes and/or mixture production plants to permit the production of components with new and different
20 physical and chemical characteristics and/or in the production plants of the individual structural components to change the specification of the tyres being produced. It is also necessary to change the operating sequence (different assembly method) and/or
25 the equipment and adjustment of the manufacturing machinery whenever a change is made in the structure and/or the specification of the tyre to be produced. Finally, it is necessary to have at least one vulcanizing mould for each different tread design-
30 specification pair.

All of the above entails continuing costs for the purchase of moulds with different specifications and different tread designs, and of different equipment, costs for installing the latter, losses of output due
35 to machine downtime (a change of process or equipment

generally causes machine downtime), and waste of material. For example, in the case of continuous production of components, machine downtime of downstream plants and/or a change in the characteristics of the components generates excess production which has to be rejected, since it is impossible to re-use it.

Given these circumstances, in the applicant's perception the production of a large number of types of tyre in a single plant is generally undesirable, particularly if the objective of minimizing costs is to be pursued. In fact, this objective is incompatible with a frequent change of equipment and production processes. When production processes of the conventional type are used, the applicant has observed that, where the volume of sales of each individual type is sufficiently high, the number of the production plants can be multiplied in such a way as to make it possible to produce a different type continuously in each plant, thus minimizing the aforesaid disadvantages. On the other hand, where the volumes of sales forecast for specific types are not particularly high, for example on an annual basis, it is also possible in each case to carry out the whole production for at least one year immediately and continuously, to contain the production costs for these types. This system may, however, affect the quality of the sold product, and tends to increase storage costs, since the products remain in stock for a long period. The risk associated with sales also increases, for example as a result of unforeseen rapid obsolescence of the product, and there is an increase in the financial costs of capital tied up in the stocks of the product and in the installation of the moulds which are to be used only

for the restricted period necessary to complete the production of the forecast reduced volume.

In order to tackle these problems, the applicant has already developed a production method in which each series of tyres identical to each other as regards production is broken down into daily lots, each comprising a quantity of tyres sufficient to cover the daily output of one mould. In this way the production of tyres having different specifications and/or different constructional characteristics is optimized by eliminating the storage of large quantities of crude and vulcanized tyres. This method is described in European patent application EP 875364 in the name of the present applicant.

In a tyre production plant, the step of vulcanization of the tyre is carried out in a period which is essentially identical for ranges of all the types of tyres, but on the other hand the tyre manufacturing time differs considerably according to the type of tyre to be produced. Additionally, the application of even a single component takes different lengths of time for different types of tyre.

This impedes a frequent change of type within the plant described above, since the creation of waiting times for the vulcanization step would occur whenever a tyre to be vulcanized belonged to a different type from that preceding it in the crude tyre processing sequence.

Moreover, a frequent change of type of tyre within one processing batch also entails a frequent change of the equipment for making the different types, thus further increasing the waiting times.

For the purposes of the present invention, the term "serial processing plant" denotes a plant in which the individual steps of processing of the tyre are

carried out in a fixed sequence, in other words in which each tyre processing step starts immediately after the preceding step has ended.

The applicant has observed that, in a serial
5 processing plant, the total production process time is dependent on the slowest processing step.

For the purposes of the present invention, the term "critical processing period" denotes a processing period in which no changes are planned in the equipment
10 during the tyre processing sequence.

The applicant has tackled the problem of controlling the functions of the plant in such a way as to produce, within a single critical period, types of tyres which are different from each other, while
15 minimizing the waiting times which are due primarily to the difference in the rates of the crude tyre manufacturing steps between tyres of different types.

According to the present invention, the applicant has provided a tyre production plant in which different
20 types of tyre can be produced within the same critical processing period without increasing the waiting times.

More particularly, the applicant has provided a plant for manufacturing crude tyres of different types by the successive assembly of elementary components on
25 toroidal drums of predetermined dimensions. Therefore, once the number of tyres to be produced for each type within a critical period has been decided, it is possible to determine a sequence for introducing the different drums into the plant and a sequence for the
30 various processing steps which make it possible to keep the average time for producing the quantity of crude tyres for this critical period essentially constant. In a plant of this kind, the processing and the sequence of depositing the various components on the drum are
35 not the same for all the types of tyre, and, at the

same time, different types of tyre are produced within the same critical period.

The tyre is assembled in successive workstations, in each of which one of the said elementary components
5 is deposited on the drum.

The applicant has provided a plant in which each work station is controlled by a local unit capable of recognizing the drum which arrives at it, and consequently the type of tyre which is to be produced.
10 Each local unit communicates with a central unit of the plant which controls the passage of a drum from one workstation to the next and distributes control to the different work stations.

One aspect of the present invention relates to a
15 plant for producing tyres of different types simultaneously, comprising a plurality of operating units operating in succession, and characterized in that it comprises:

- a central processing unit capable of causing the
20 sequential execution of a plurality of operating steps at work stations, each of which comprises at least one of the said operating units, according to one or more predetermined sequences of types of tyres,
- a local processing unit associated with each work
25 station and capable of identifying the type of tyre corresponding to a drum supplied to each of the said operating units, and of selecting one of a predetermined group of operating procedures for each of the said operating units which is specific to the type
30 of tyre corresponding to the drum being worked on.

In particular, each drum comprises a code identifying the type of tyre to be produced on it.

In particular, each work station comprises at least one reader of the said code identifying the type
35 of tyre.

Preferably, the said identification code is associated with a shaft of the said drum.

Preferably, the said code identifying the type of tyre is a bar code.

5 Preferably, the said reader of the said identification code is associated with each operating unit.

10 Preferably, the said reader of the said identification code is associated with a robotic arm of each operating unit.

In a further aspect, the present invention relates to a method for manufacturing tyres of different types in an automatic plant comprising a plurality of operating units operating in succession, characterized
15 in that it comprises the steps of:

- causing, in a central processing unit, the sequential execution of a plurality of operating steps in the said operating units, according to one or more predetermined sequences of types of
20 tyres;
- identifying the type of tyre corresponding to a drum supplied to each of the said operating units;
- selecting, from a predetermined group of operating procedures for each of the said operating units, a
25 specific procedure for the type of tyre corresponding to the drum being worked on.

Preferably, the said step of identifying the type of tyre comprises the reading of a code identifying this type associated with the drum being worked on.

30 Further characteristics and advantages will be made clear by the following detailed description of the present invention, with reference to the attached figures, provided solely by way of example and without restrictive intent.

Figure 1 shows a layout of the plant according to the present invention.

Figure 2 shows schematically the steps of a tyre production process according to the present invention.

5 Figure 3 shows schematically the connections between the units of the plant of Figure 1.

Figure 1 shows an embodiment of a plant for manufacturing tyres according to the present invention. The plant comprises a complex manufacturing unit 2 for
10 the production of crude tyres, in which each tyre being processed is manufactured by the assembly of its structural components in a predetermined sequence, and a complex vulcanizing unit 3 in which each tyre arriving from the complex manufacturing unit 2 is
15 vulcanized within a corresponding mould 34, 35, 36, 37, 38, 39.

The complex manufacturing unit 2 comprises a plurality of work stations 5, 6, 7, 8, 9, 10 arranged consecutively along a processing path, preferably of
20 the closed loop type, shown for guidance by the arrows 11 in the attached Figure 1. This line also has a feed station 20, a temperature stabilizing device 21, a first holding station 22, a multiple holding station 23, a second holding station 24, a third holding
25 station 25 and a terminal holding station 26.

The work stations 5, 6, 7, 8, 9, 10 are capable of operating simultaneously, with each operating on at least one tyre being processed, to assemble at least one of its structural components on to the tyre.

30 More particularly, during the assembly steps the various structural components used in the production of each tyre are conveniently engaged on a supporting member, preferably consisting of a toroidal support or drum whose profile essentially reproduces the internal
35 configuration of the tyre to be produced. This toroidal

support is made in such a way that it can easily be removed from the tyre when the processing has been completed.

At least a first and a second type of tyre can be
5 treated simultaneously in both the complex
manufacturing unit 2 and in the complex vulcanizing
unit 3. By way of example, in the following
description, with reference to the layout shown in the
attached Figures 1 and 2, two different types of tyre,
10 differing from each other in their dimensional
characteristics, are treated simultaneously. Clearly,
it is also possible to operate simultaneously on a
different number of types which may have, in addition
or as an alternative to dimensional differences,
15 differences in terms of structural components and/or
chemical and physical characteristics and/or
appearance.

In the layout shown for guidance in the attached
figures, the toroidal supports are shown without
20 distinction between them and the tyres being processed
which are engaged on them, and are identified by the
letters A and B, each of which denotes a specific type
of tyre.

As may be noted, the tyres being processed are
25 distributed along the line of the complex manufacturing
unit 2 in such a way that the different types A and B
succeed each other in a pre-set sequence. Additionally,
the pre-set sequence of tyres to be produced within a
critical period can be divided into a plurality of
30 series having the same sequence of tyres or having a
different sequence, according to the types which are to
be produced in each series. In the example shown in
Figure 1, a series comprising six tyres, A, B, B, A, B,
A, is distributed along the line of the production
35 plant 1. In this example, a total of six toroidal

supports, on each of which a corresponding tyre is manufactured, are therefore simultaneously operated within the complex manufacturing unit 2.

It should be noted that, for the purposes of the present description, the term "series" denotes a set of 5 tyres of different types or of the same type, which follow each other in a predetermined sequence. In the complex manufacturing unit 2 it is possible to provide, for example, a plurality of series, each consisting of 10 different types of tyre, which advantageously succeed each other cyclically, for example according to the pattern A, B, A, B, or series each of which advantageously consists of a tyre of a first type interposed between two tyres of a second type, or 15 series each of which consists of tyres which are all of the same type, or various combinations of the said sequences.

Devices for the functional transfer and movement of the tyres operate in the plant to sequentially 20 transfer each of the tyres being processed A and B from one of the work stations 5, 6, 7, 8, 9, 10 of the complex manufacturing unit 2 to the next, and to the complex vulcanizing unit 3. The said devices also functionally move the toroidal support during the 25 deposition of at least one of the said structural components.

This functional movement comprises a rotation of the toroidal support about its axis and a rotation and/or translation of this axis in space.

30 Preferably, these devices comprise one or more robotic arms R1, R2, R3, R4, R5, R6, R7 and R8, each of which is associated with at least one of the work stations 5, 6, 7, 8, 9, 10 and is capable of operating on the individual toroidal supports A or B, to carry

out the sequential transfer of each tyre being processed.

The tyre is fabricated by moving the toroidal support and orientating it in space and applying the
5 extruded structural components thereon by both circumferential and axial deposition.

The said robotic arms advantageously support the said toroidal supports so that they project, in other words by gripping them at only one side on the axis of
10 rotation, thus enabling the various components to be deposited over the whole of the axial extension of the support which has a curvature with two bends.

A processing unit commands the transfers along the said loop path and determines the number and
15 composition of the said series of tyres within a desired critical period. This unit is capable of controlling the said functional transfer and movement devices in such a way as to co-ordinate the steps of processing on each type of tyre in the complex
20 manufacturing unit 2 and in the complex vulcanizing unit 3.

More particularly, in the illustrated embodiment there is a first robotic arm R1, movable along a guide structure 19 if necessary, and operating between the
25 complex manufacturing unit 2 and the complex vulcanizing unit 3, to pick up a finished tyre from the latter and transfer it to the first work station 5, where the tyre is removed from the corresponding toroidal support by means of the robotic arm R8. The
30 toroidal support A extracted from the tyre is then transferred by the first robotic arm R1 from the first work station 5 into the temperature stabilizing device 21.

If the type to be produced requires the use of a
35 toroidal support different from that which has been

dismantled previously, the robotic arm R1 picks up the appropriate toroidal support from the feed station 20 and inserts it into the temperature stabilizing device 21.

5 This device 21 is capable of bringing the toroidal support to a preferred temperature to permit the subsequent processing, and particularly to promote the adhesion of the first layer of elastomeric material to the metal of the support. This temperature is
10 preferably in the range from 80°C to 90°C.

 A second robotic arm R2 serves to transfer the toroidal support from the temperature stabilizing device 21 to the second work station 6 where the first constructional components of the tyre are assembled.
15 The assembly operation may, for example, comprise the coating of the outer surface of the toroidal support A with a thin layer of airtight elastomeric material, usually called a liner, carried out by a liner processing unit 61, and the application of any
20 necessary elastomeric strips in the areas corresponding to the beads of the tyre, carried out by the strip processing unit 62, and/or the formation of an additional lining layer made from elastomeric material and laid on top of the liner, carried out by the sub-
25 liner processing unit 63.

 Preferably, at the second work station 6, and also at the remaining work stations 7, 8, 9, 10, the formation of each structural component of the tyre is carried out in conjunction with the previously
30 described step of assembly, by the processing of at least one basic semi-finished product which is identical for each type of tyre A or B and supplied in a predetermined quantity according to the type of tyre to be constructed.

In particular, at the second work station 6 the production of the liner, the elastomeric strips and/or the additional lining layer can advantageously be carried out by winding at least one strip-shaped element made from elastomeric material on to the toroidal support A being processed, in consecutively adjacent and if necessary also at least partially superimposed turns, this element having a width, for example, in the range from 0.5 to 3 cm, and being drawn directly from a corresponding extruder, from a reel or from other suitable feed devices associated with the second work station 6.

The winding of the turns can be advantageously simplified by giving the second robotic arm R2 the function of holding the toroidal support A, by means of suitable gripping and driving members, and making it rotate about its own axis, thus moving it suitably in front of pressure rollers or equivalent application devices (not described) combined with feed devices, in such a way as to produce a correct distribution of the strip element with respect to the outer surface of the toroidal support. For further details of the procedure for the application of the structural components on a toroidal support with the aid of a robotic arm, reference should be made to European Patent Application No. 98830762.5 in the name of the present applicant, which is incorporated herein in its entirety by reference.

When the assembly of the components at the second work station 6 has been completed, the second robotic arm R2 deposits the toroidal support, with the corresponding tyre under construction, at the first holding station 22. A third robotic arm R3 picks up the toroidal support from the first holding station 22 to transfer it to the third work station 7, where the

structural components which contribute to the formation of the carcass structure of the tyre are assembled.

More particularly, at the third work station 7 one or more carcass plies are produced and assembled, together with a pair of annular reinforcing structures in the areas corresponding to the beads of the tyre. In a similar way to that described with reference to the operating steps carried out at the second work station 6, each of these structural components is produced directly at the assembly step, using a basic semi-finished product supplied in a predetermined quantity according to the type of tyre being processed.

For example, the carcass ply or plies can be formed by sequentially depositing on the toroidal support a plurality of strip pieces, cut individually from a continuous strip element formed by a band of rubberized cords laid parallel to each other. In turn, each annular reinforcing structure can comprise a circumferentially inextensible insert consisting, for example, of at least one metal wire element wound in a plurality of radially superimposed turns, together with a filler insert of elastomeric material which can be made by applying an elongate elastomeric element wound in a plurality of axially adjacent and/or radially superimposed turns.

Each of the said continuous strip element, metal wire element and elongate elastomeric element, which form the basic semi-finished product to be used in a predetermined quantity to produce the corresponding structural component, can be taken directly from an extruder, from a reel or from other suitable feed devices associated with the third work station 7.

For further explanations of the procedure for producing the carcass structure, reference should be made to European Patent Application No. 98830472.1 in

the name of the present applicant, which is incorporated herein in its entirety by reference.

In the layout shown in the attached figure, the third work station 7 is designed to produce carcass structures such as those described in European Patent Application No. 98830662.7, also in the name of the present applicant, which is incorporated herein in its entirety by reference. The carcass structure described in this patent application comprises two carcass plies, each consisting of a first and a second series of strip pieces deposited in an alternating sequence on the toroidal support. A pair of annular reinforcing structures of the type described previously is also provided in each bead of the tyre, each of these structures being inserted between the terminal flaps of the pieces, belonging to the first and second series respectively, and forming one of the carcass plies, together with an inextensible insert applied externally with respect to the second carcass ply.

To facilitate the sequential assembly of the various structural components in the predetermined order, the third work station 7 is made to be equipped with at least three different work stations designed respectively for the deposition of the strip pieces (unit 71), of the metal wire element (unit 72), and of the elongate elastomeric element (unit 73), which operate simultaneously, each on a corresponding tyre being processed. Consequently, three tyres, even if they are of different types from each other, can be treated simultaneously in the third work station 7, each of the tyres being sequentially transferred from one to another of the processing units until the carcass structure has been completed. The sequential transfer of the tyres into the various processing units provided at the third station 7 can be carried out by

the third robotic arm R3, assisted if necessary by a fourth robotic arm R4 and/or by any necessary auxiliary transfer devices and by the multiple holding station 23, at which more than one toroidal support can be present at the same time. This system makes it possible to minimize the waiting periods when the tyre being processed in this work station are of types which differ from each other; this is because it is possible to use the multiple holding station 23 to carry out processing on types which require a longer time at the most favourable moment, by advantageously altering the order of the sequence of arrival of the toroidal supports at the work station. In the attached Figure 1, the unit 71 for depositing the carcass plies is engaged with a type B tyre and the unit 72 for depositing the bead wires is engaged with a type A tyre.

On completion of the carcass structure, the fourth robotic arm R4 deposits the toroidal support at the second holding station 24.

The fifth robotic arm R5 picks up the toroidal support from the second holding station 24, to carry it to the fourth work station 8, which in the illustrated example is occupied by a type A toroidal support. At the fourth work station 8, the structural components serving to form what is known as the belt structure of the tyre are produced and assembled. In particular, a first processing unit 81 provided at the fourth work station 8 deposits, directly on the previously formed carcass structure, two under-belt strips extending circumferentially in the shoulder areas of the tyre. These under-belt strips can be extruded directly from an extruder and applied with the aid of pressure rollers or equivalent application devices. A second processing unit 82 forms a first and second belt strip on the carcass structure, each strip being formed by

the sequential deposition of strip pieces laid adjacent to each other circumferentially, each piece being made by cutting to size a continuous strip element consisting of a plurality of cords adjacent and parallel to each other and incorporated in an elastomeric layer. A further processing unit 83 forms a further belt strip winding a continuous cord in turns which are axially adjacent to each other and radially superimposed on the underlying belt layers. Further details of a possible procedure for producing the belt structure are described in European Patent Application No. 97830633.0, in the name of the present applicant, which is incorporated herein in its entirety by reference.

When the belt structure has been completed, the sixth robotic arm R6 transfers the tyre being processed to the fifth work station 9. At the fifth work station 9, the toroidal support B is engaged by the robotic arm R6 with the aid of which a tread strip is applied, this tread strip being produced by the winding of at least one further elastomeric strip element in consecutively adjacent and radially superimposed turnings until a tread strip having the desired configuration and thickness is obtained. In the illustrated example, the operation is carried out by two units 91 and 92. When the aforesaid operations have been completed, the sixth robotic arm R6 deposits the toroidal support at the third holding station 25.

The tyre is then transferred to the sixth work station 10, occupied by a type A tyre in the illustrated example. At the sixth work station 10, the toroidal support is engaged by the seventh robotic arm R7 which causes it to move suitably in front of corresponding processing units to carry out the application of abrasion-resistant elements to the areas

corresponding to the beads (unit 101), and the application of the sidewalls, which are also produced by winding at least one elastomeric strip in adjacent and/or superimposed turns (unit 102).

5 When this operation is finished, the seventh robotic arm R7 deposits the manufactured tyre at the terminal holding station 26, where the tyre is held until it is transferred to the complex vulcanizing unit 3.

10 Each of the work stations 5, 6, 7, 8, 9, 10 not only has one or more processing units, but also comprises a feed device for supplying the basic elements required for the production of the
15 corresponding structural component, operating in conjunction with application devices present in the aforesaid units, which apply the basic element and/or the resulting structural component to the tyre being processed.

20 The complex vulcanizing unit 3 advantageously comprises at least one set of vulcanizing moulds 34, 35, 36, 37, 38, 39, the number of which is equal to the quantity of tyres included in the said series of tyres being processed in the complex manufacturing unit 2. In the illustrated example, six vulcanizing moulds 34, 35,
25 36, 37, 38, 39 are provided, each corresponding to the specification of one of the types of tyre manufactured along the line of the complex manufacturing unit 2.

30 Preferably, the moulds 34, 35, 36, 37, 38, 39 are mounted on a rotatable platform 30 which can be rotated with a step-by-step movement, in such a way that the
35 moulds are made to follow a path, within the complex vulcanizing unit 3, to bring them sequentially, one after the other, next to a loading and discharge station 40 for the tyres being processed. This rotation preferably takes place with a first rotation in a first

direction of rotation, followed by a rotation in the direction opposite the first. Alternatively, this rotation may be of the closed loop type.

Each of the moulds 34, 35, 36, 37, 38, 39 is fed
5 with pressurized steam through a corresponding
connecting line (not shown) extending radially from a
central column in which steam supply devices,
consisting of a boiler for example, are integrated or
connected in another way. The whole rotatable platform
10 30 can advantageously be enclosed in an insulated
structure having at least one access aperture located
next to the loading and discharge station 40, in order
to prevent excessive dissipation of heat to the
exterior.

15 Advantageously, the transfer of the individual
tyre being processed into the corresponding moulds 34,
35, 36, 37, 38, 39 is carried out by the robotic arm R1
at a rate equal to the rate of completion of the crude
tyres being processed in the work stations distributed
20 along the line of the complex manufacturing unit 2.

The plant described by way of example operates in
the following steps, shown schematically in Figure 2
and associated with the movements of the robotic arms
R1, R2, R3, R4, R5, R6, R7 and R8. In the figure, and
25 in the remainder of the present description, the steps
identified by the letter T followed by a progressive
number refer to the manufacturing of a crude tyre, and
the steps identified by the letter C followed by a
progressive number refer to the vulcanization of the
30 tyre and to the dismantling of the toroidal support.

T1) The robotic arm R1 picks up a toroidal support,
termed the "core" below, from the feed station 20, and
inserts it in the temperature stabilizing device 21.

T2) The core is extracted from the device 21 by the
35 robotic arm R2 and is positioned in front of an

extrusion head of the unit 61. The arm R2 rotates the core in such a way that the extruder deposits a strip of elastomeric material on the surface of the core.

5 T3) The robotic arm R2 positions the core in front of an extrusion head of the unit 62. The arm R2 rotates the core in such a way that the extruder deposits a strip of elastomeric material on the specified portion of the surface of the core.

10 T4) (optional) The robotic arm R2 positions the core in front of an extrusion head of the unit 63. The arm R2 rotates the core in such a way that the extruder deposits a strip of elastomeric material close to the beads of the core.

15 T5) The core is deposited by the robotic arm R2 at the first holding station 22.

T6) The robotic arm R3 picks up the core from the first holding station 22 and inserts it into the carcass ply deposition unit 71, at which a first layer of carcass ply pieces is deposited.

20 T7) The robotic arm R3 picks up the core from the carcass ply deposition unit 71 and inserts it into the bead wire deposition unit 72, within which a pair of annular reinforcing structures is deposited on the core in the areas corresponding to the beads of the tyre.

25 T8) The robotic arm R3 picks up the core from the bead wire deposition unit 72 and deposits it in one of the locations of the multiple holding station 23.

30 T9) The robotic arm R4 picks up the core from the holding position 23 and places it in front of an extrusion head of the elastomeric filler deposition unit 73. The arm R4 rotates the core in such a way that the extruder applies a strip of elastomeric material on the beads of the tyre being processed.

35 The preceding three steps can be repeated a number of times, according to the type of tyre which is being

produced. For this purpose, the multiple holding station 23, having multiple locations, each capable of holding one core, is provided, together with two robotic arms R3 and R4 for producing the carcass structure.

T10) The robotic arm R4 deposits the core at the second holding position 24.

T11) The robotic arm R5 picks up the core from the second holding position 24 and places it in front of an extrusion head of the under-belt strip deposition unit 81. The arm R5 rotates the core in such a way that the extruder deposits a strip of elastomeric material in the shoulder areas of the tyre.

T12) The robotic arm R5 inserts the core into the belt strip deposition unit 82.

T13) The robotic arm R5 picks up the core from the unit 82 and inserts it into the processing unit 83 which forms a further belt layer by winding a continuous cord in turns axially adjacent to each other and radially superimposed on the underlying belt layers.

T14) The robotic arm R5 deposits the core back in the second holding position 24.

T15) The robotic arm R6 picks up the core from the second holding position 24 and places it in front of an extrusion head of the under-tread strip deposition unit 91. The arm R6 rotates the core in such a way that the extruder deposits a strip of elastomeric material on the crown area of the tyre being processed.

T16) The robotic arm R6 places the core in front of an extrusion head of the tread strip deposition unit 92. The arm R6 rotates the core in such a way that the extruder deposits a strip of elastomeric material on the crown area of the tyre being processed.

T17) The robotic arm R6 deposits the core at the third holding station 25.

T18) The robotic arm R7 picks up the core from the third holding station 25 and places it in front of an extrusion head of the abrasion-resistant layer deposition unit 101. The arm R7 rotates the core in
5 such a way that the extruder deposits a strip of elastomeric material on the beads of the tyre being processed.

T19) The robotic arm R7 places the core in front of an extrusion head of the sidewall deposition unit 102. The
10 arm R7 rotates the core in such a way that the extruder deposits a strip of elastomeric material on the sides of the tyre being processed.

T20) The robotic arm R7 deposits the core at the terminal holding station 26.

15 The crude tyre is now complete; the subsequent steps are concerned with the vulcanization of the tyre and its removal from the core.

C1) The robotic arm R1 picks up the core, with the crude tyre manufactured on it, and transfers it to the
20 complex vulcanizing unit, and in particular into a vacant vulcanizing mould 39.

C2) The vulcanizer closes the mould and rotates by one position. The tyre is vulcanized in the period of one complete rotation of the vulcanizing apparatus. At the
25 end of each step of this rotation, each of the other moulds is loaded with a crude tyre to be vulcanized.

C3) The first robotic arm R1 picks up the vulcanized tyre, together with the corresponding toroidal support, from the mould 39, and deposits it at the first
30 manufacturing station 5, in a station 16 for dismantling the toroidal support.

C4) The eighth robotic arm R8 removes the toroidal support and deposits it in a recovery station 28.

C5) The eighth robotic arm R8 picks up the vulcanized
35 tyre and deposits it on a storage platform 14 where the

tyres produced previously by the plant can be placed while they are waiting to be sent to the subsequent finishing and inspection steps.

The procedure for treating the individual tyres
5 along the line of the complex manufacturing unit 2 is such that the deposition of a structural component can advantageously be carried out independently of the completion of the production of another component on the immediately preceding tyre in the production
10 process. A characteristic of the invention is that the structural components of the tyre are prepared essentially at the moment of their deposition, thus making it possible to operate without previously stored semi-finished products, and to adapt each unit
15 immediately to the type of tyre being processed, thus avoiding wastage of material.

Additionally, the operation of each of the processing units located at the individual work stations 5, 6, 7, 8, 9, 10, and that of each of the
20 robotic arms, is controlled by a programmable local processing unit, in such a way that the quantity of basic semi-finished products supplied is controlled appropriately, together with the movement imparted to the toroidal support, to ensure that the individual
25 structural components of the tyres being processed are correctly formed. In particular, this local processing unit can be programmed in such a way as to adapt the operation of the processing units of the robotic arms to the type of tyre being treated from time to time in
30 each individual work station.

Moreover, in order to impart greater operating flexibility to the plant, without limitation to predetermined sequences of different types of tyre, provision is preferably made to associate each of the
35 work stations 5, 6, 7, 8, 9, 10 with devices for

identifying the type of tyre being processed, interacting with selection devices to determine the quantity of basic element to be used for producing each structural component in the work station in question.

5 For example, these identification devices can advantageously comprise a reader of bar codes or other types of code associated with the toroidal support of the tyre, which can be identified, by means of suitable reading devices, by the local processing unit, for the
10 purpose of selecting the quantity of semi-finished product, for example by using pre-set tables of values.

At the moment at which a tyre is transferred to any of the work stations 5, 6, 7, 8, 9, 10, the bar code reader identifies the type to which the tyre
15 belongs, enabling the local processing unit to set the operating program of the work station in a suitable way, in addition or as an alternative to the instructions received from the central unit.

In particular, Figure 3 shows a layout which makes
20 clear the communications between the central unit 111 and the local processing units 106, 107 and 108 associated with each work station 6, 7 and 8. This figure shows only three work stations, particularly the second work station 6, the third work station 7 and the
25 fourth work station 8, in which the liner layer, the carcass structure and the belt structure are applied respectively. A unit for producing semi-finished products 206 or 207 or 208, otherwise known as a feed device for supplying the basic semi-finished product to
30 be placed on the drum, is shown within each station. In particular, at the second work station 106 this unit 206 produces the elongate elastomeric element; at the third work station 107 this unit 207 produces the continuous strip element formed, for example, from a
35 band of rubberized cords parallel to each other; and at

the third station 108 this unit 208 produces the continuous tape element, consisting for example of a plurality of cords adjacent and parallel to each other and incorporated in an elastomeric layer.

5 Each of the units for producing the semi-finished products 206 or 207 or 208 communicates with the respective local unit 106 or 107 or 108. The programs for placing the semi-finished products on the drum, corresponding to the types of tyre that can be
10 manufactured in the plant, are loaded into each local unit associated with a work station. A database 222 which can be interrogated by the central unit contains all the programs for the placing of the various components for the types of tyres that can be
15 manufactured in the plant. This data base is updated whenever a new type is produced.

 In particular, the programs comprise instructions for the robotic arms concerning the movement of the drum and instructions for the units for producing the
20 semi-finished products. These programs are made available, preferably when the plant is started up, to the local units according to the operations which they are to carry out.

 The flow of operations takes place in the
25 following way:

 The central unit 111 receives a production request which comprises the types to be produced and their measurements and quantity.

 This unit prepares one or more series of tyres to
30 be produced in a continuous flow, and enables each work station, by means of a communication with each local unit, to pick up a drum from a holding station, in such a way that the preset sequence is maintained. The central unit also positions the correct moulds on the
35 vulcanization turntable for producing these types.

Each local unit recognizes the drum to be picked up by means of the aforesaid identification means located on the drums, for example the aforesaid bar code. The recognition of the drum and therefore of the type of tyre to be produced enables the local unit to activate the correct program for the operation to be carried out on the drum of the work station in question. At the end of the operation, each local unit sends a signal to the central unit which monitors the flow of tyres being processed and which determines their advance from one work station to the next.

For example, the said bar code may be located on a shaft of the said drum. The robotic arm picks up the drum by grasping it by means of this shaft.

The devices for reading the said bar code are preferably associated with each operating unit. Even more preferably, these devices for reading the said bar code are associated with each work station. Additionally, these devices for reading the said bar code can be associated with each robotic arm present at each work station.

The movement of the tyres being processed is advantageously managed in the form of a continuous flow in which the complex manufacturing unit 2 is directly connected to the complex vulcanizing unit 3, the sequential transfer of the individual tyres being carried out at a rate equal to the rate of completion of the tyres in the complex manufacturing unit 2, thus advantageously eliminating the need for storing crude tyres in storage buffers provided between the complex manufacturing unit and the complex vulcanizing unit.

The possibility of changing the assembly sequence of the various structural components according to the type of crude tyre to be produced enables the average

manufacturing time to be matched to the vulcanizing time.

In the preceding description, the production of two different types of tyres, A and B, was covered by way of example. The first type A relates to a tyre
5 having the 195/65 R15 specification, and the type B relates to a tyre having the 225/50 R16 specification. The type A comprises a single layer of carcass plies, while the type B comprises a double layer of carcass
10 plies. Because of the diversity of dimensions and consequently the different volumes of the two different types, the processes carried out on type B require a longer time than the processes carried out on type A. However, while the processes at the first, second,
15 fourth and fifth work stations are compatible with the total cycle times, the process at the third work station 7, at which the carcass structures are produced, is significantly different for the two types, particularly in that it requires the repetition of the
20 deposition of a layer of carcass plies for type B.

If the processes described above were carried out in succession, it would then be necessary either to extend the cycle times by adapting them to the type which requires the longer times, or to provide an
25 additional work station.

However, the pair of robotic arms R3 and R4 and the multiple holding station 23 are able to change the processing sequence.

For example, if the first tyre to arrive at the
30 third work station 7 is a type B tyre, in other words the one requiring a longer processing time, the pre-set processing sequence is modified. This is made possible by the fact that some processes require a time shorter than the rate required to keep the complex vulcanizing
35 unit always supplied with a tyre for each rotation of

the rotatable platform 30. Thus it is possible to recover useful time for making the change in the sequence.

The processing time in each processing unit and
5 the rate of transfer are determined according to the number of steps of movement required along the line of the complex vulcanizing unit 3, in such a way that each tyre A, B can remain in the complex vulcanizing unit for a time at least sufficient to complete the
10 vulcanization process.

For example, at the carcass structure production station (third work station) type A requires a minimum processing time of approximately 1.5 minutes, and type B requires a minimum processing time of approximately 3
15 minutes, owing to the fact that this type requires a double application of the carcass plies, as described above.

At the work stations which apply the liner and sub-liner (second work station), the belt structure
20 (fourth work station), the sidewalls and the abrasion-resistant strip (sixth work station), the (minimum) processing time is less than 2.5 minutes for both types A and B. The work station which applies the tread strip (fifth work station) requires a (minimum)
25 processing time of approximately 2.5 minutes for both types A and B.

The complex vulcanizing unit 3 has six vulcanizing moulds; to carry out vulcanization in the chosen conditions, each mould is required to remain in the
30 vulcanizer for 15 minutes. To achieve this vulcanizing time while the rotatable support of the vulcanizer carries out six steps of rotation, one cover has to be fed to the complex vulcanizing unit once every $15:6 = 2.5$ minutes.

According to the data supplied above, this time is compatible with the times of the stations 6, 8, 9 and 10, while the third work station 7 is critical, since type B requires a processing time here which is too
5 long for the desired rate.

In order to enable the third step to be carried out, a plurality of series of types which are initially fed to the complex manufacturing unit is provided.

Each series consist of a number of tyres equal to
10 the number of the vulcanizing moulds.

Each series consists of three type A tyres and three type B tyres, according to a first order, defined as follows: A1 B1 B2 A2 B3 A3 (the numbers 1, 2, 3 etc. associated with each type A, B in the sequence identify
15 the succession in time of the different types of tyre fed in the sequence).

After the application of the liner and the sub-liner (second work station) the order in each series remains unaltered.

20 At the third work station, the processing sequence requires, for example, the execution of the following consecutive steps:

1. production of the single carcass ply on A1; A1 continues to the following work stations;
- 25 2. production of the first carcass ply on B1; B1 is put to wait in the multiple holding station 23;
3. production of the first carcass ply on B2; B2 is put to wait in the multiple holding station 23 (in a different location from that occupied by B1);
- 30 4. production of the second carcass ply on B1; B1 continues to the following work stations;
5. production of the single carcass ply on A2; A2 continues to the following work stations;
6. production of the second carcass ply on B2; B2
35 continues to the following work stations;

7. production of the first carcass ply on B3; B3 is put to wait in the multiple holding station 23;
8. production of the single carcass ply on A3; A3 continues to the following work stations;
- 5 9. production of the second carcass ply on B3; B3 continues to the following work stations.

After the third work station, the series has a second order, as follows: A1 B1 A2 B2 A3 B3; this second order is different from the initial order. The number of steps carried out is nine; each step requires a processing time of 1.5 minutes, and therefore the total time for which the work station is occupied in applying the carcass structure on the six tyres is $1.5 \times 9 = 13.5$ minutes. The total time is less than 15 minutes, representing the desired rate for the vulcanization of six tyres.

As a result of the pre-set order of the series, together with the steps carried out at the third work station as described above, the time for the production of the carcass structure on type B is no longer critical.

In this example, the order is not modified further at the following work stations, and the rate of 2.5 minutes is maintained in all the following stations, since they all require a processing time which is less than or equal to 2.5 minutes.

Additionally, type A1 is ready for the following station after 1.5 minutes, whereas another 4.5 minutes elapse between it and the next type B1.

In the following processes, type A1 can be slowed by approximately 1 minute, while the processing of type B1 has to be accelerated by 1 minute. The slowing is carried out by the holding station 23, or by slowing the rate of application of one or more of the subsequent components.

The acceleration of type B1 is achieved by carrying out the following processing in the minimum time, particularly by carrying out the operations of depositing the belt structure and sidewalls in 2
5 minutes each.

The vulcanizing moulds are arranged in accordance with the second order, in other words in the sequence A1 B1 A2 B2 A3 B3, in such a way as to receive type A where a vulcanizing mould for this type is provided.

10 The series follow each other along the manufacturing and vulcanizing lines until the end of the critical period, at which point the moulds can be replaced if different types are to be produced in the following critical period.

15 With the procedure described above, within a critical period of, for example, eight hours, 96 type A tyres and 96 type B tyres are produced.

In view of the above, for two types, such as A and B, it is necessary to specify a series in which one
20 type B is followed by at least one type A, such that the sum of the times for the processing of the type A tyres by a predetermined work station (for example that in which B undergoes the same process at least twice)
25 up to the end of the manufacturing of the crude tyre is shorter than the average total time of the said processes by a time corresponding to the time difference between the types A and B in the said predetermined step.

This makes it possible to carry out the processing
30 step which requires the longest time without causing a delay in the execution of the following steps.

A change in the order of the series at the third work station 7 which forms the carcass structure was described above; the present invention is also
35 applicable to types of tyres which also differ from

each other in the deposition of other components, for example the belt structures. In this case, the sequence will also be modified at the fourth work station 8, by providing a further multiple holding station.

5 More generally, according to the location of the critical step in the processing sequence, the work steps will be accelerated or the waiting times between the steps preceding or following the said critical step will be reduced, in such a way as to compensate for the
10 excess time introduced by the critical step.

Where necessary, a special holding station can be provided.

In the plant according to the present invention, the pre-set series and the modifications of the order
15 of each series are made possible by the functional transfer and movement devices, particularly the robotic arms, which enable the processing steps to be disassociated from each other. This is because a change in the order of the series means that one type of tyre
20 follows a different processing path from that of another type. The functional transfer and movement devices make it possible, within a single critical operating period, to use a number of paths simultaneously, one for each type of tyre being
25 processed.

Each series represents a time package of steps organized in paths, each of these corresponding to one type of tyre produced. The path through the various processing steps determines the type of tyre
30 manufactured.

Additionally, the numbers of the said holding stations, of the said moulds, and of the said functional transfer and movement devices can vary according to how many, and which, types of tyre are to

be produced within a critical period, as well as in relation to the performance of the equipment used.

When required, it is also possible to reduce the effective time of the vulcanization process carried out on the individual tyres, for example by retarding the injection of the steam into the mould 34, 35, 36, 37, 38, 39 after the tyre has been introduced into it. It is therefore possible, alternatively, to set different effective vulcanization times for the various types of tyre being processed.

The present invention also makes it possible to eliminate or at least to minimize the downtimes on each occasion when a type of tyre being produced is changed.

This is because, in these cases, the toroidal supports and the vulcanizing mould suitable for the production of one type have to be replaced with toroidal supports and the vulcanizing mould suitable for the production of the new type.

This replacement, which, however, is required only when the dimensional and/or tread pattern characteristics are changed, can be carried out with minimal effect on output, by providing suitable equipment if necessary.

The invention therefore makes it possible to conveniently produce tyres in very small batches, down to a few units, without requiring significant increases in the unit cost of the tyres.

It is also possible to produce batches of tyres comprising tyres which are all of different types from each other, without requiring changes in the equipment which produces the crude tyres.

CLAIMS

1. Plant for producing tyres of different types simultaneously, comprising a plurality of operating units operating in succession, and characterized in that it comprises:
- a central processing unit capable of causing the sequential execution of a plurality of operating steps at work stations, each of which comprises at least one of the said operating units, according to one or more predetermined sequences of types of tyres,
 - a local processing unit associated with each work station and capable of identifying the type of tyre corresponding to a drum supplied to each of the said operating units, and of selecting, from a predetermined group of operating procedures for each of the said operating units, a specific procedure for the type of tyre corresponding to the drum being worked on.
2. Plant according to Claim 1, in which each drum comprises a code identifying the type of tyre to be produced on it.
3. Plant according to Claim 1, in which each work station comprises at least one reader of the said code identifying the type of tyre.
4. Plant according to Claim 2, in which the said identification code is associated with a shaft of the said drum.
5. Plant according to Claim 2, in which the said code identifying the type of tyre is a bar code.


6. Plant according to Claim 3, in which the said reader of the said identification code is associated with each operating unit.

5 7. Plant according to Claim 3, in which the said reader of the said identification code is associated with each robotic arm of each operating unit.

8. Method for manufacturing tyres of different types
10 in an automatic plant comprising a plurality of operating units operating in succession, characterized in that it comprises the steps of:

- causing, in a central processing unit, the sequential execution of a plurality of operating
15 steps in the said operating units, according to one or more predetermined sequences of types of tyres;
- identifying the type of tyre corresponding to a drum supplied to each of the said operating units;
- 20 - selecting, from a predetermined group of operating procedures for each of the said operating units, a specific procedure for the type of tyre corresponding to the drum being worked on.

25 9. Method according to Claim 8, in which the said step of identifying the type of tyre comprises the reading of a code identifying this type associated with the drum being worked on.

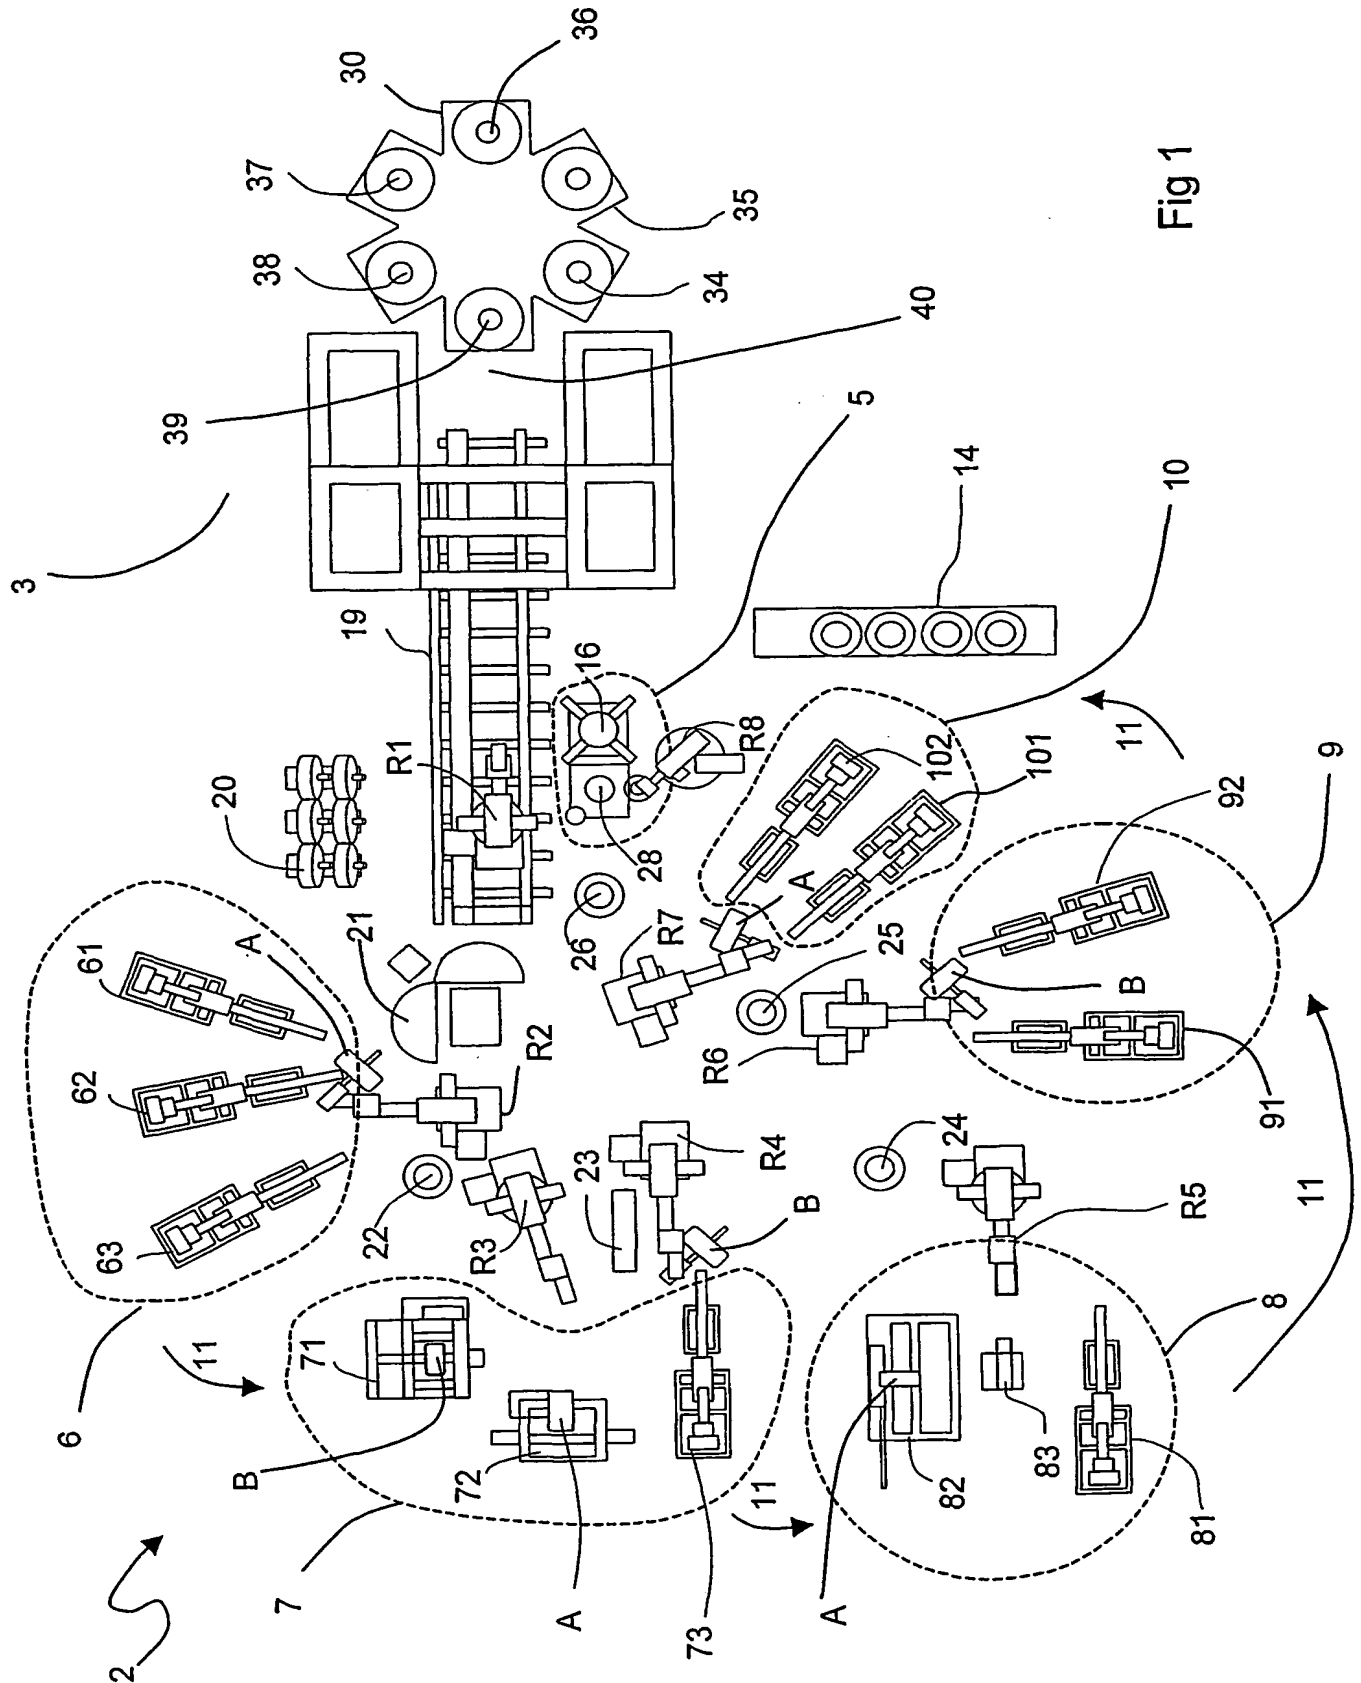

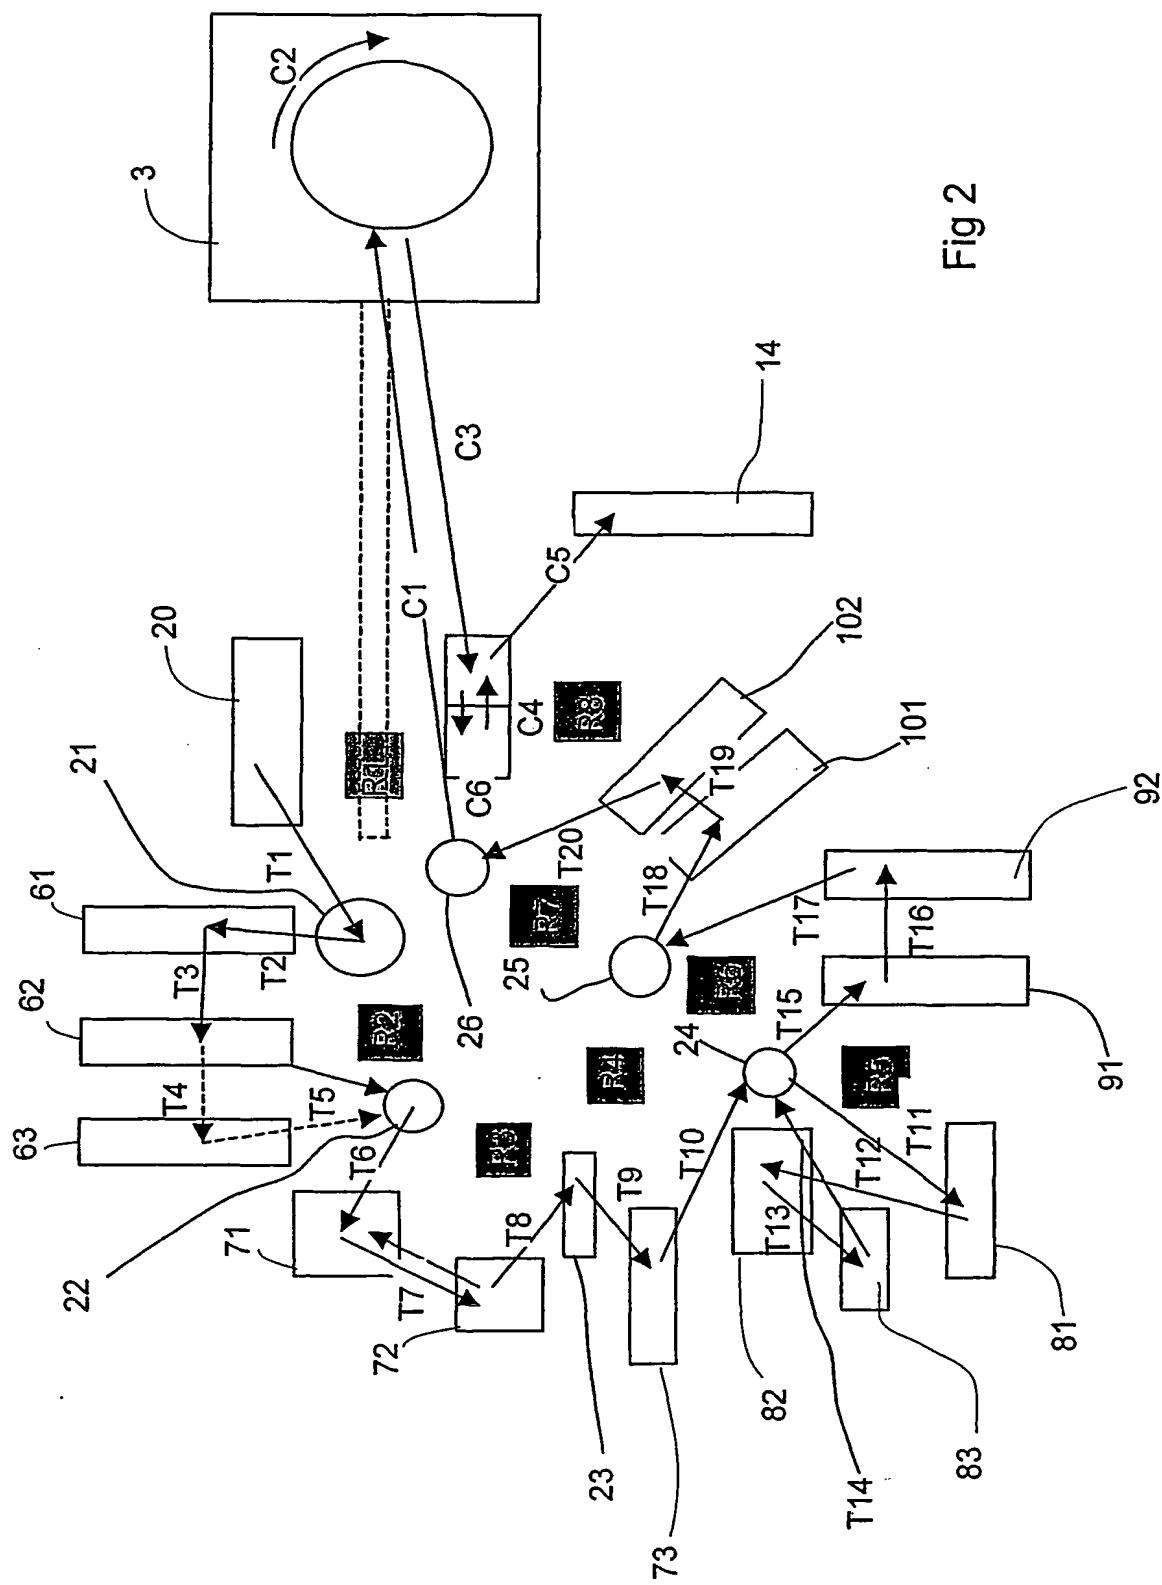


Fig 2

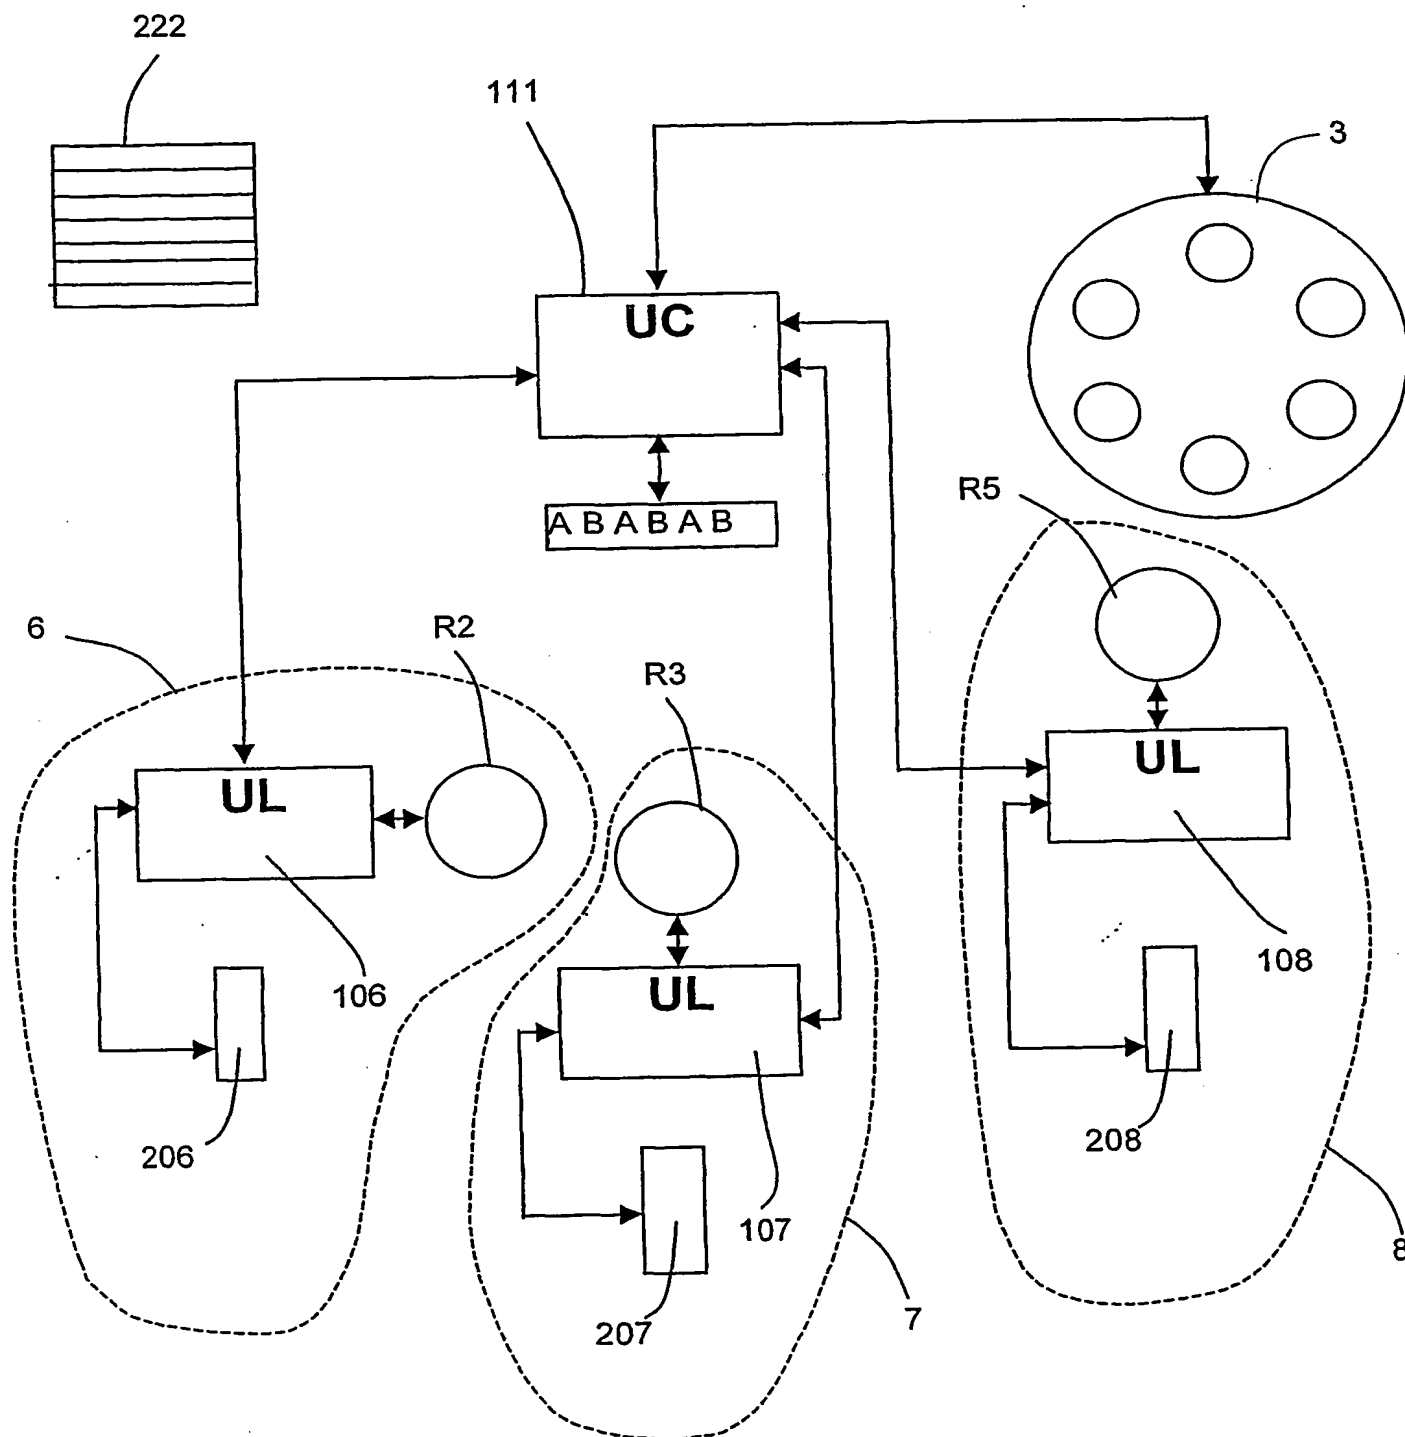


Fig 3

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 B29D30/00 G05B19/12

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 B29D G05B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 356 181 A (BROTHER IND LTD) 28 February 1990 (1990-02-28) abstract page 3, line 24 - line 63 page 6, line 33 - line 40 claim 1 figures 1-3	1-3,5,6, 8,9
A	EP 0 875 364 A (PIRELLI) 4 November 1998 (1998-11-04) cited in the application column 20, line 48 -column 21, line 10 figure 2	1,8
A	US 4 773 810 A (NISHIMURA SEIICHIRO ET AL) 27 September 1988 (1988-09-27) column 9, line 24 -column 10, line 29 figure 2	1,8
	--- -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

Z document member of the same patent family

Date of the actual completion of the international search

28 September 2001

Date of mailing of the international search report

09/10/2001

Name and mailing address of the ISA
European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Bibollet-Ruche, D

INTERNATIONAL SEARCH REPORT

International Application No
PCT/EP 01/05844

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 685 821 A (SP REIFENWERKE GMBH) 6 December 1995 (1995-12-06) column 1, line 33 -column 2, line 21 -----	1,8

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 01/05844

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0356181	A	28-02-1990	JP 2008737 C	11-01-1996
			JP 2055081 A	23-02-1990
			JP 7038907 B	01-05-1995
			DE 68905404 D1	22-04-1993
			DE 68905404 T2	29-07-1993
			EP 0356181 A1	28-02-1990
			US 5003897 A	02-04-1991
EP 0875364	A	04-11-1998	EP 0875364 A2	04-11-1998
			BR 9801526 A	27-04-1999
			CN 1198379 A	11-11-1998
			JP 11042651 A	16-02-1999
			TR 9800763 A1	23-11-1998
US 4773810	A	27-09-1988	JP 62251125 A	31-10-1987
EP 0685821	A	06-12-1995	DE 4419296 A1	07-12-1995
			EP 0685821 A2	06-12-1995